


ASSEMBLY INSTRUCTIONS



SET B1KIT

BRAKE SET WITH FLOATING BRAKE DISC

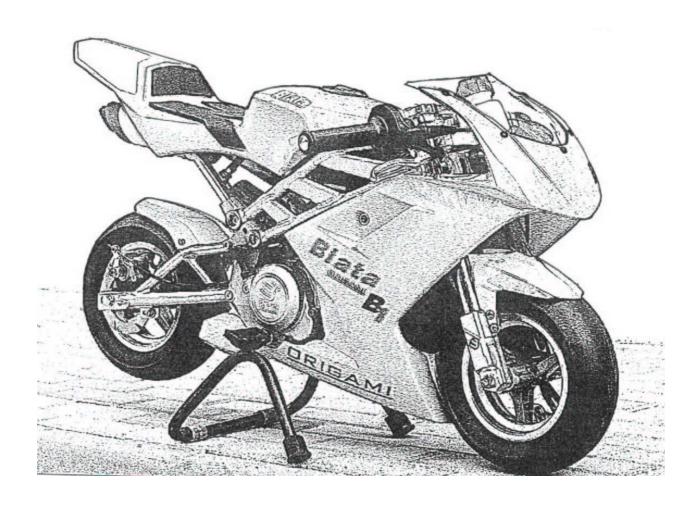

The brake set B1KIT with floating brake disc is designed for minibikes Blata ORIGAMI B1 and B1 KIT.

Set contents:

No.	ITEM	Pcs
332.045.00	BRAKE DISC - LEFT	1
342.031.00	FRONT BRAKE - LEFT	1
342.006.00	BRAKE CABLE	1
912.006.02	SCREW M 5 x 16	3

Assembly instructions

- dismantle the front lining
- loosen the cable retainer and dismantle the brake cable



unscrew the screw 312.018.00 and remove the brake pads and the brake pad spring from the

caliper



- loosen the nut M10 and pull out the front wheel axle. Then pull the wheel out from the brake caliper in the direction of front fork





- remove the brake caliper from the brake holder



- mount-on the kit brake caliper without brake pads and the pads spring (watch out for the brake shaft 312.038.00 in the caliper!)
- dismantle the brake disc from the wheel and mount-on the floating brake disc. Tighten the screws with properly adjusted torque wrench (15 Nm). For all right torque settings see the table in the Service manual, page 22





- re-mount the wheel on the front fork and tighten the wheel axle nuts (torque 35 Nm)
- re-fit the brake pads and brake pad spring into the caliper and secure them with screw





- mount the new brake cable on
- follow the instructions in the Service manual to carry out the brake adjusting (chapter Basic brake adjusting).